


BEST AVAILABLE COPY

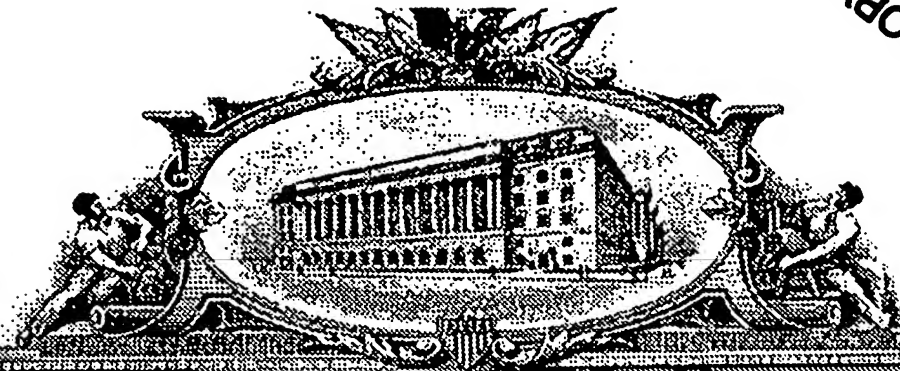

1223649

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office

November 23, 2004

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE.

APPLICATION NUMBER: 60/489,425
FILING DATE: July 23, 2003
RELATED PCT APPLICATION NUMBER: PCT/US04/23833

Certified by

Jon W Dudas

Acting Under Secretary of Commerce
for Intellectual Property
and Acting Director of the U.S.
Patent and Trademark Office



16086 U.S. PTO

Please type a plus sign (+) inside this box → PTO/SB/16 (02-01)
Approved for use through 10/31/2002. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

Express Mail Label No. EV 314198363

21906 U.S. PTO
60/489425

07/23/03

INVENTOR(S)					
Given Name (first and middle (if any))		Family Name or Surname		Residence (City and either State or Foreign Country)	
Donald Edwin Douglas Allan		HARGRAVES CURTIS		Huntersville, North Carolina Troutman, North Carolina	
<input type="checkbox"/> Additional inventors are being named on the ___ separately numbered sheets attached hereto					
TITLE OF THE INVENTION (280 characters max)					
PUMP VALVE WITH CONTROLLED STROKE					
Direct all correspondence to: CORRESPONDENCE ADDRESS					
<input checked="" type="checkbox"/> Customer Number		23638		→ Place Customer Number Bar Code Label here	
OR Type Customer Number here					
<input type="checkbox"/> Firm or Individual Name					
Address					
Address					
City		State		ZIP	
Country		Telephone		Fax	
ENCLOSED APPLICATION PARTS (check all that apply)					
<input checked="" type="checkbox"/> Specification		Number of Pages		<input type="checkbox"/> CD(s), Number	
		7			
<input checked="" type="checkbox"/> Drawing(s)		Number of Sheets		<input type="checkbox"/> Other (specify)	
		4			
<input checked="" type="checkbox"/> Application Data Sheet. See 37 CFR 1.76					
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT					
<input checked="" type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27.				FILING FEE AMOUNT (\$)	
<input type="checkbox"/> A check or money order is enclosed to cover the filing fees					
<input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number:		01-0265		\$80.00	
<input type="checkbox"/> Payment by credit card. Form PTO-2038 is attached.					
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.					
<input checked="" type="checkbox"/> No.					
<input type="checkbox"/> Yes, the name of the U.S. Government agency and the Government contract number are: _____					

Respectfully submitted,

SIGNATURE



TYPED or PRINTED NAME

Jonathan M. Hines

TELEPHONE

704-375-9249

Date

07, 23, 03

REGISTRATION NO.

(if appropriate)

Docket Number:

44,764

2974/5

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Washington, D.C. 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Box Provisional Application, Assistant Commissioner for Patents, Washington, D.C. 20231.

PUMP VALVE WITH CONTROLLED STROKE

BACKGROUND OF THE INVENTION

[0001] This invention relates generally to pumps and more particularly to a check valve for a pump. Many types of pumps use check valves, however for the purpose of describing the present invention diaphragm pumps in particular are considered herein. Typical diaphragm pumps use an elastomeric component as a passive check valve to facilitate the pumping action of the pump. A pump will typically contain two valves, one identified as the inlet valve and the other identified as the outlet valve. During the down-stroke or intake stroke of the pump, the suction action of the diaphragm will pull the inlet valve into an open position and the outlet valve into a closed position thus pulling the media into the pump on the inlet side only. During the up-stroke or exhaust stroke of the pump, the compression action of the diaphragm will push the inlet valve into a closed position and the outlet valve into an open position thus expelling the media on the outlet side only.

[0002] The valves will perform this cycle once during each cycle of the pump. For a diaphragm pump, this equates to once per full revolution. Therefore, a diaphragm pump that runs at 4000 RPM will cycle the valves 67 times per second. The speed of the pump multiplied by the volume the pump displaces with each stroke determines how much force is applied to actuate the valve, thus directly impacting how far the valve will displace if not physically limited. If this valve travel distance is not controlled correctly, the valve can easily travel further than required or could also be over-restricted and not be allowed to travel as far as needed. Either condition results in a pump that runs inefficiently and/or produces higher than desired noise levels.

[0003] Accordingly, there is a need for a pump valve having a controlled stroke.

BRIEF SUMMARY OF THE INVENTION

[0004] The above-mentioned need is met by the present invention, which provides an elastomeric valve disposed in a compartment typically located within the pump head. The flexibility of the valve and the dimensions of the porting inside the valve compartment which receives the valve are selected to result in a controlled valve stroke during operation.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] The subject matter that is regarded as the invention may be best understood by reference to the following description taken in conjunction with the accompanying drawing figures in which:

[0006] Figure 1 is an exploded perspective view of a pump head constructed in accordance with the present invention.

[0007] Figure 2 is a perspective view of a valve for use with the present invention.

[0008] Figure 3 is a top view of the valve of Figure 2.

[0009] Figure 4 is a side view of the valve of Figure 3.

[0010] Figure 5 is a side cross-sectional view of a prior art valve in an at-rest or closed position.

[0011] Figure 6 is a side cross-sectional view of a prior art valve in a fully extended or open condition.

[0012] Figure 7 is a side cross-sectional view of a valve compartment constructed in accordance with the present invention, with the valve in a fully extended or open position.

[0013] Figure 8 is a side cross-sectional view of a pump head constructed in accordance with the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0014] Figure 1 illustrates a portion of a prior art diaphragm pump assembly. A head 10 is attached to a chamber 12. The head 10 and the chamber 12 are referred to collectively as a pump head 14. Inlet and outlet connections 16 and 18 extend from the head 10. Each of these connections communicates with a fluid flow path through the pump head 14 and into a diaphragm pump body of a known type (not shown) which is attached to a lower end 20 of the pump head 14. The head 10 and the chamber 12 each have complementary recesses 22 therein. When the head 10 is assembled to the chamber 12, these recesses 22 cooperate to define an inlet valve compartment 24 and an outlet valve compartment 26. Inlet and outlet diaphragm valves 28 and 30 are received in these compartments and are trapped between the head 10 and the chamber 12. The upper part of the inlet valve compartment 24 is defined by an annular, radiused inlet valve seat 32 formed in the head 10. The inlet valve 28 seals against the inlet valve seat 32 in the closed position. The lower part of the inlet valve compartment 24 is defined by an inlet valve pocket 34 in the chamber 12 opposite the inlet valve seat 32.

[0015] The outlet valve compartment 26 is substantially identical to the inlet valve compartment 24, except for the direction of flow. The upper part of the outlet valve compartment 26 is defined by an outlet valve pocket 36 formed in the head 10. The lower part of the outlet valve compartment 26 is defined by an annular, radiused outlet valve seat 38 in the chamber 12, opposite the outlet valve pocket 36. The outlet valve 30 seals against the outlet valve seat 38 in the closed position.

[0016] Figures 2, 3, and 4 illustrate an exemplary valve 40, which is representative of both the inlet valve 28 and the outlet valve 30 as used in the diaphragm pump described herein. The valve 40 is a flat, elongated member of an elastomeric material having a central portion 42 connected to a pair of end tabs 44 by a pair of necked-down portions 46. In the illustrated example the valve 40 has an overall length "L" of about 13.5 mm (0.530 in.), a width "W" of about 5.2 mm (0.205

in.), and a thickness "T" of about 0.69 mm (0.027 in.) These dimensions may be varied to suit a particular application.

[0017] Each of the inlet and outlet valves 28 and 30 has a "stroke" defined as the deflection of its center portion from the fully open position to the fully closed position. Figures 5 and 6 show partial cross-sections through the inlet valve compartment 24 of the pump head 14 of Figure 1. For a typical application the depth "D" of the prior art inlet valve pocket 34 is such that the inlet valve stroke may be about 1.14 mm (0.050 in.) Similarly, the outlet valve (not shown in Figures 5 and 6) has a stroke of about 1.27 mm (0.050 in.) The depth D of the prior art valve pockets allow an essentially uncontrolled stroke, with resulting over-travel, of the valves.

[0018] When the outlet valve 30 has over-traveled during the up-stroke, on the subsequent down-stroke, media will be pulled in through the inlet side and, for an unknown duration, the outlet side. This reduces the overall throughput (free flow) of the pump and the ability to achieve the maximum load points (pressure or vacuum). During the next up-stroke of the pump, the same effect will occur with the inlet valve 28. Because the inlet valve 28 was allowed to over-travel during the previous down-stroke, media will be expelled on the inlet side for an unknown duration in addition to the outlet side. Both of these conditions may be described as valve "overlap" which is undesirable in this type of pump.

[0019] Figure 7 is a partial cross-sectional view through the inlet valve compartment of an exemplary pump head 114 constructed in accordance with the present invention. Figure 8 is an orientation view which shows the portion "A" of the pump head 114 that is illustrated in Figure 7. It is noted that Figures 5 and 6 depict the details of the same area of the prior art pump head 14. The pump head 114 is substantially similar to the prior art pump head 14 described above and includes a chamber 112, a head 110, and an inlet valve 128. The chamber 112 has an inlet valve pocket with a reduced depth "d", relative to the prior art. In this example, the depth "d" of the inlet valve pocket 134 is set such that the inlet valve travel is only about 0.64 mm (0.025 in.), instead of the 1.14 mm (0.050 in.) allowed for the prior

art inlet valve 28 in the same application. This prevents over-travel of the inlet valve 128. The travel of the outlet valve (not shown) is limited in a similar fashion, by modifying the depth of the outlet valve pocket in the head 110.

[0020] The inverse of over-travel is under-travel. If the valve is limited from traveling far enough, the flow of media through the port is restricted and the pump efficiency is again compromised. To overcome this condition, the pump speed would need to be increased to make up for the built-in restriction, thus consuming more energy and operating at higher noise levels. It is therefore important to note that the valve travel is not simply reduced. The valve travel must be matched to the performance requirements of the pump and the characteristics of the valve material. Elastomer durometer, for example, will affect how the valve travel should be controlled. A lower durometer material, 40 durometer for example, will have a much greater uninhibited travel than say a 90 durometer material and will require a tighter control on valve travel distance. Under-travel may be controlled by the selection of elastomeric material used for the valve. A higher durometer elastomer, 90 durometer for example, will not be as likely to succumb to an over-extension during its open time, but will also not seal as well against the valve seat when it is in a closed position, and may be subject to under-travel.

[0021] A benefit of using a softer durometer material is a more efficient sealing condition between the elastomeric valve and the valve seat. A softer durometer elastomer, 40 durometer for example, will seal more effectively being more able to conform to minor irregularities in the sealing surface. The more flexible material will, however, be more apt to over-extend during the actuation of the valve thus staying open longer than required. The limitation of the valve stroke in the present invention allows the use of a relatively soft durometer elastomer for the valve by the limiting of the pocket depth.

[0022] It has been found that by controlling the valve travel as described above, the pump will become more efficient and, all other conditions being equal, the overall pump performance will improve. It is noted that just by regulating the valve stroke to

a more efficient point, the sound level of the pump has a tendency to be reduced slightly. Furthermore, because the overall pump performance increases, the speed of the pump can be reduced to return the performance to the desired level. As pump speed is one of the largest contributing factors for elevated sound levels, this has an even more dramatic effect on reducing the noise levels.

[0023] The optimum valve stroke will differ depending on the style of pump, the type of valve material, and the media being pumped. A mid range air pump using a 70 durometer ethylene propylene diene terpolymer (EPDM) valve, for example, may run most efficiently with a valve stroke of 0.64 mm (0.025 in.) A lower performance pump using an 80 durometer VITON valve material, for example, may benefit from a valve stroke as low as 0.13mm (0.005 in.) Overall pump head size will also contribute in defining the correct stroke length. A larger pump for example will have a larger valve with a greater length and sealing surface area and may operate more efficiently with a higher valve stroke. The inlet valve and outlet valve may obtain optimum performance with using different stroke distances. The important considerations are to choose the valve material and the valve pocket depth so that the valve stroke will be large enough to provide unrestricted flow for the fluid media, without being so large as to risk breaking the valve, causing excessive noise or creating valve overlap as noted above. This technique may be applied to pumps for both air and liquid with the same benefits being seen accordingly.


[0024] There are other benefits to limiting the valve stroke. For example, some types of working media, such as corrosive gaseous or liquid chemicals, may attack the valve material and cause deterioration. Therefore, special materials such as perfluoroelastomers, which are resistant to harsh chemicals, are used to construct the valve. These materials have a relatively low flexural strength and will not withstand extreme bending. If these materials are displaced beyond their limit, they can actually crack and/or break. These may fail if subjected to standard valve deflection. By controlling the displacement of the valve, exotic materials that have a

lower flexural strength can be utilized without the risk of a pump failure because of a compromised valve.

[0025] The foregoing has described a valve for use with a diaphragm pump. While specific embodiments of the present invention have been described, it will be apparent to those skilled in the art that various modifications thereto can be made without departing from the spirit and scope of the invention. It will also be apparent that pumps other than diaphragm pumps that use similar valve technology will see the same benefits from this invention. Accordingly, the foregoing description of the preferred embodiment of the invention and the best mode for practicing the invention are provided for the purpose of illustration only and not for the purpose of limitation.

1/4

FIG. 1

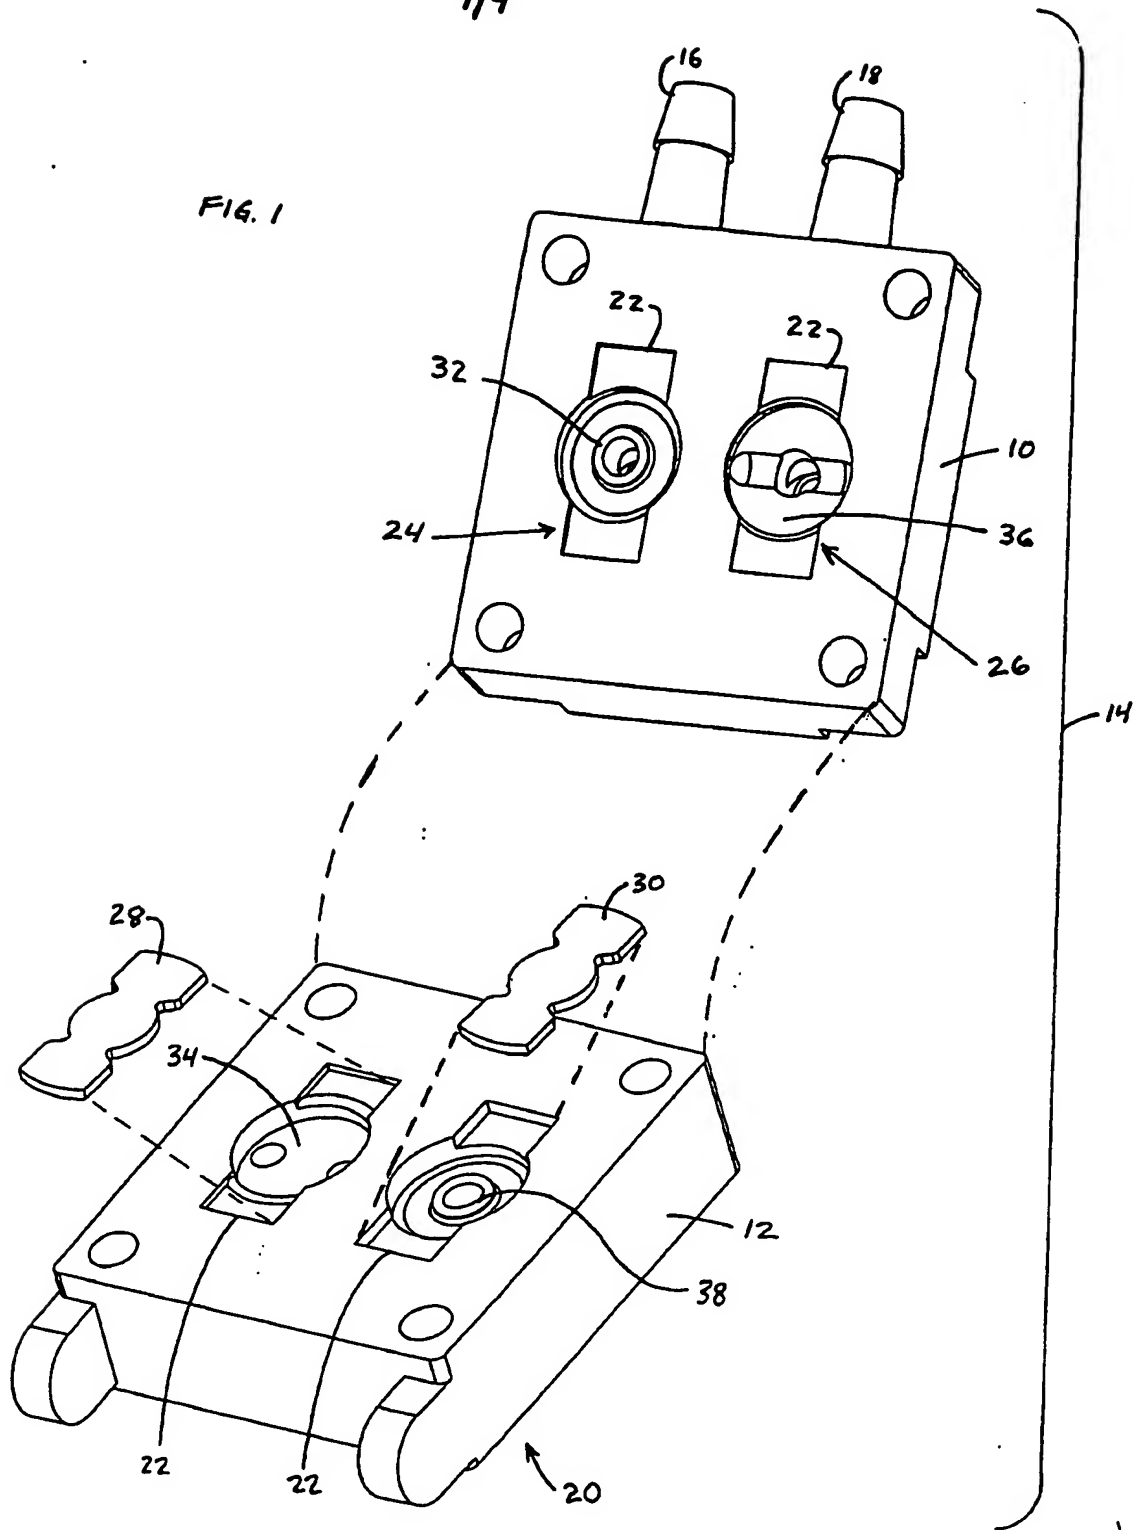

2/4

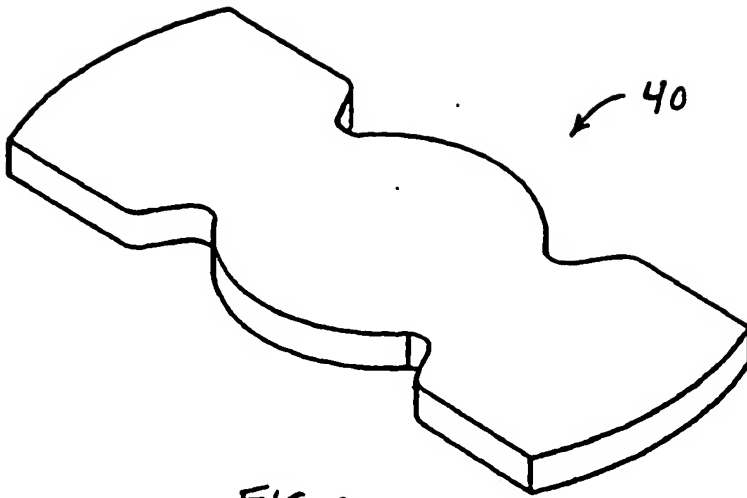


FIG. 2

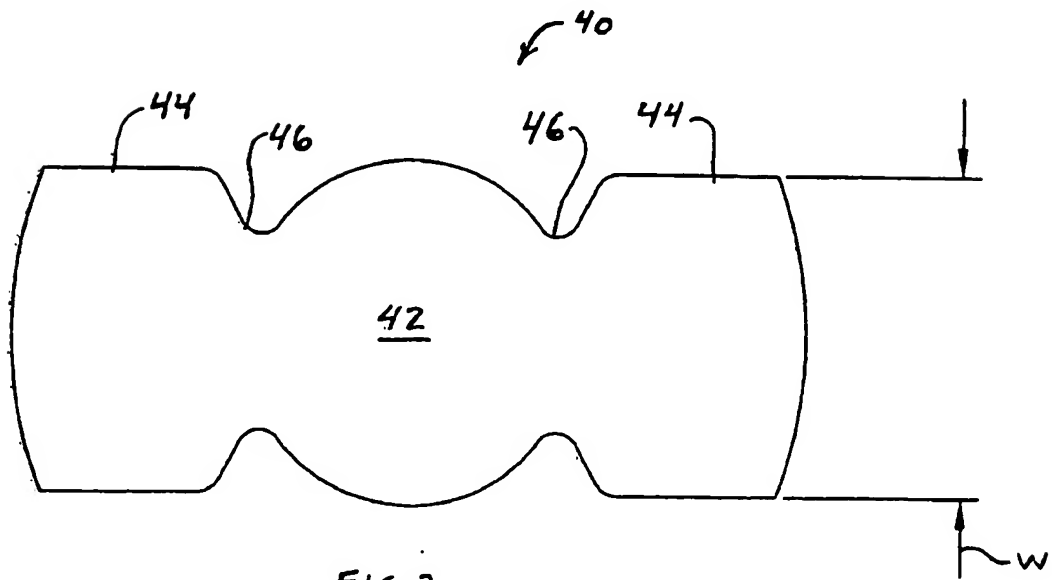


FIG. 3

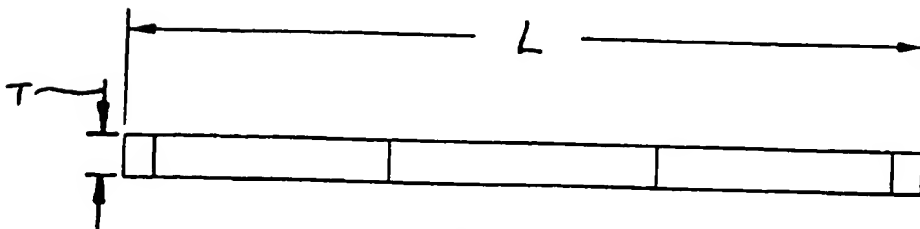


FIG. 4

3/4

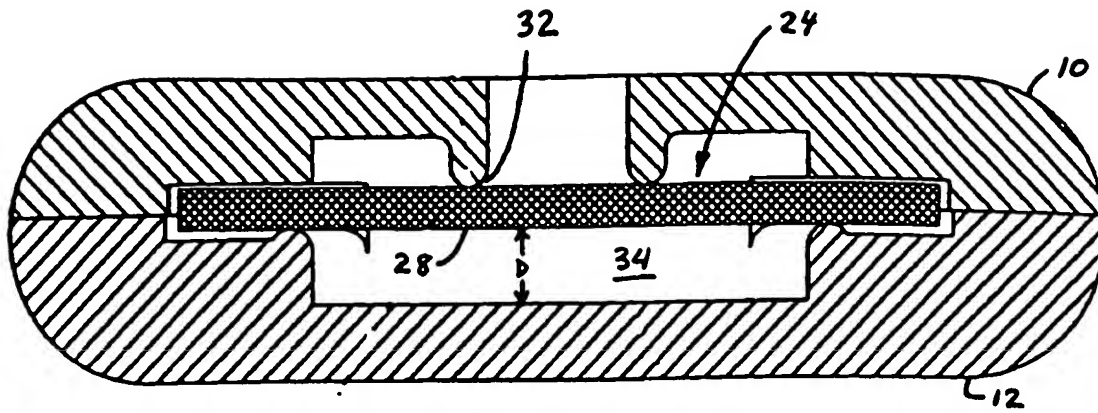


FIG. 5 (PRIOR ART)

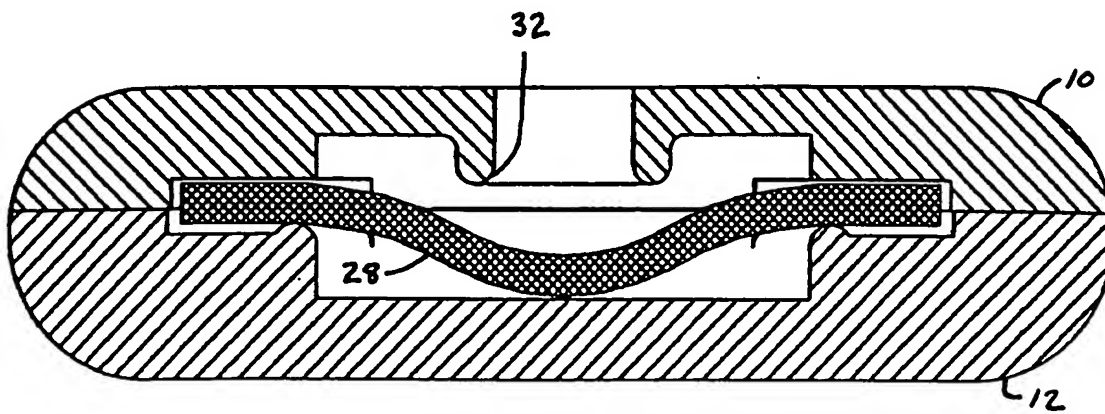


FIG. 6 (PRIOR ART)

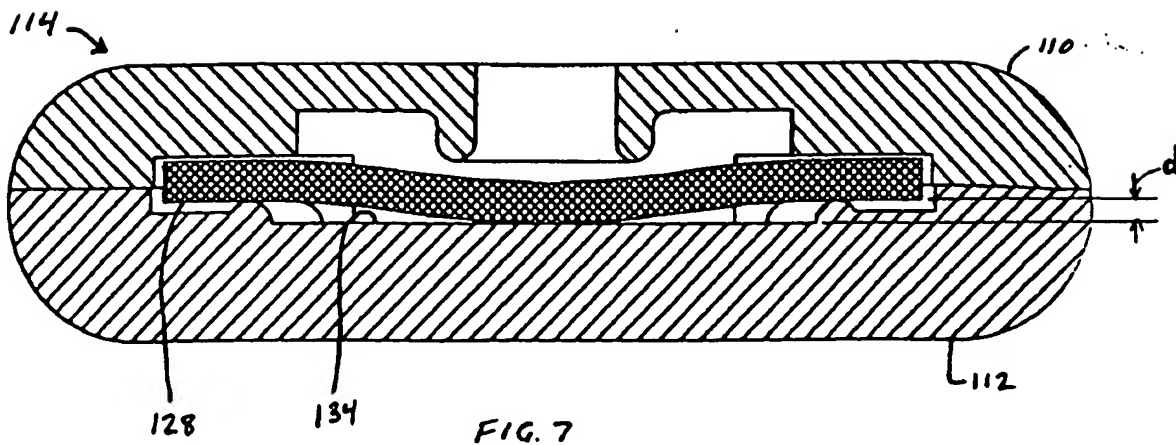


FIG. 7

4/4

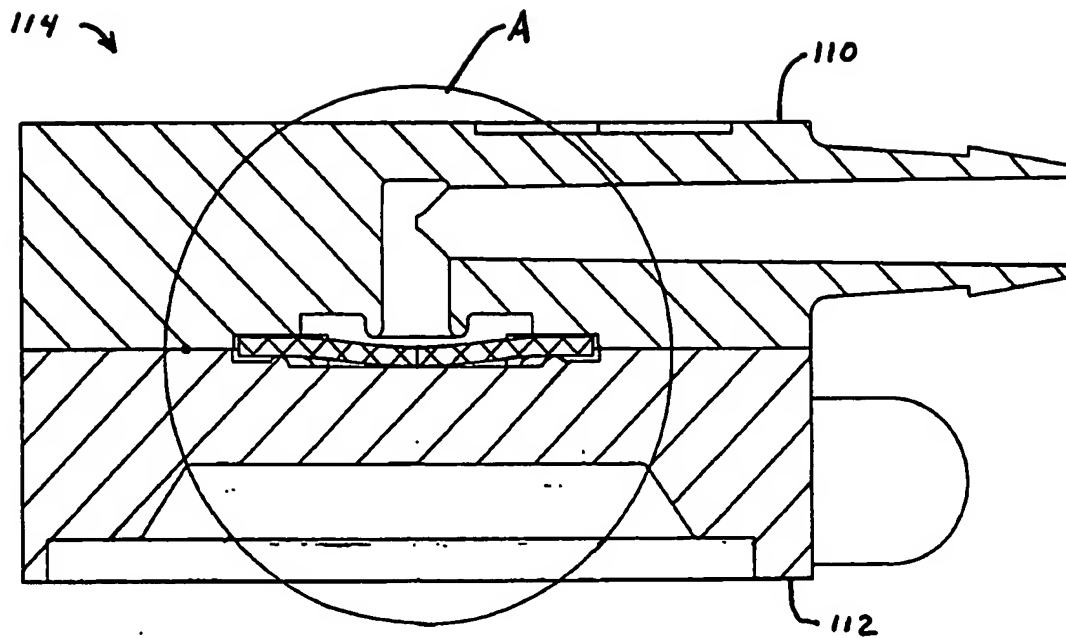


FIG. 8

Inventors Information

Inventor One Given Name:: Donald Edwin
Family Name:: HARGRAVES
Postal Address Line One:: 14100 Wynfield Creek Pkwy.
City:: Huntersville
State or Province:: North Carolina
Postal or Zip Code:: 28078
Country:: USA
Citizenship:: USA

Inventor Two Given Name:: Douglas Allan
Family Name:: CURTIS
Postal Address Line One:: 143 Denlon Lane
City:: Troutman
State or Province:: North Carolina
Postal or Zip Code:: 28166
Country:: USA
Citizenship:: USA

Correspondence Information

Name Line One:: Adams Evans, P.A.
Address Line One:: 2180 Two Wachovia Center
City:: Charlotte
State or Province:: North Carolina
Postal or Zip Code:: 28282
Telephone:: (704) 375-9249
Facsimile:: (704) 375-0729
Email:: jmh@adamspat.com

Application Information

Title Line One:: PUMP VALVE WITH CONTROLLED STROKE
Total Drawing Sheets:: 4
Formal Drawings?: No
Application Type:: Provisional

Representative Information

Registration Number One:: 29,037
Registration Number Two:: 47,394
Registration Number Three:: 44,764

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/US04/023833

International filing date: 23 July 2004 (23.07.2004)

Document type: Certified copy of priority document

Document details: Country/Office: US
Number: 60/489,425
Filing date: 23 July 2003 (23.07.2003)

Date of receipt at the International Bureau: 08 December 2004 (08.12.2004)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.